


CNT800


KABİN ALTI AŞIRI YÜK
SİSTEMLERİ

OVERLOAD SYSTEMS

CNT800
4 ACTIVE SENSORS




AC/220 VAC CONTROL UNIT




DC/24 VDC CONTROL UNIT

KONTROL ÜNİTELERİ / CONTROL UNIT

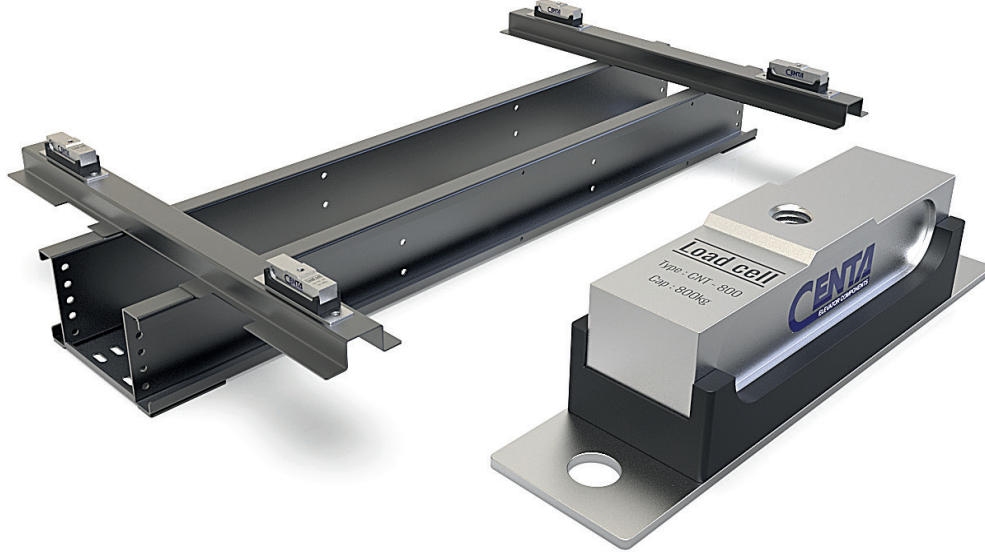


ACTIVE

4X



Ürün Ölçüleri / Product Sizes (ACTIVE SENSOR)

Birim / Unit : mm

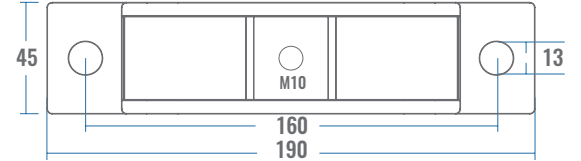

CNT800
4 ACTIVE SENSORS

CNT800 TEKNİK BİLGİLERİ

- Mekanik Kapasite (Kabin+yük): 3200 kg
- Yüksek hassasiyet ve kolay ayarlanabilme
- 4 ayrı yük için ayarlama
- Besleme gerilimi : 220 VAC / 24 DC
- 0-10 V / 4-20 mA Analog Output
- Su geçirmez sensörler IP66
- Birbirinden bağımsız çalışan tam köprü sensörler
- HOLD girişi: Kabin hareketi esnasında ölçüm sabitleme
- Dijital gösterge
- Değişik kabin tipleri için kalibrasyon imkanı
- Lastik izolasyonlu
- Otomatik sıfırlama

CNT800 TECHNICAL INFORMATION

- Mechanical capacity (cabin+load): 3200 kg
- High precision and easy to adjust
- Programming with keys for different weight points
- Supply voltage : 220 VAC / 24 DC
- 0-10 V / 4-20 mA Analog output
- Water proof sensors IP66
- Independent working full-bridge sensors
- HOLD input: To stop the measuring during the travel
- Digital display
- Calibration for different cabin - fixings
- Isolation material is included
- Automatic adjust to zero