


RS4

ASANSÖR HALAT ŞİŞESİNE
BAĞLANABİLİR AŞIRI YÜK SİSTEMİ

SENSOR FOR ROPE - FITTINGS OF
ELEVATORS

RS4
DENGE ZİNCİRİ KOMPENZASYONU
CHAIN COMPENSATION

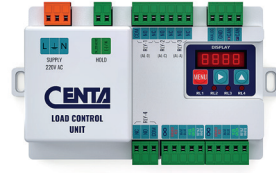


AC/220 VAC CONTROL UNIT



DC/24 VDC CONTROL UNIT

KONTROL ÜNİTELERİ / CONTROL UNIT

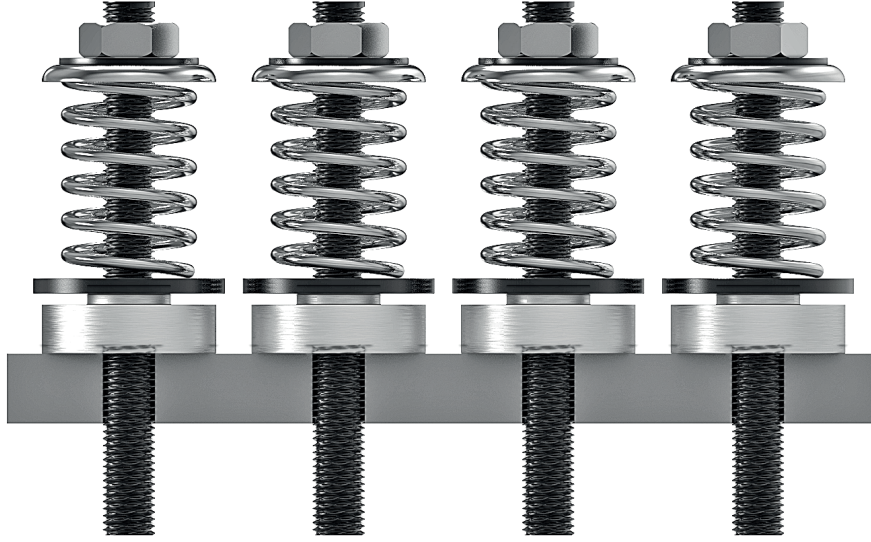


RS4

DENGE ZİNCİRİ KOMPENZASYONU
CHAIN COMPENSATION

Ürün Ölçüleri / Product Sizes (ACTIVE SENSOR)

Birim / Unit : mm

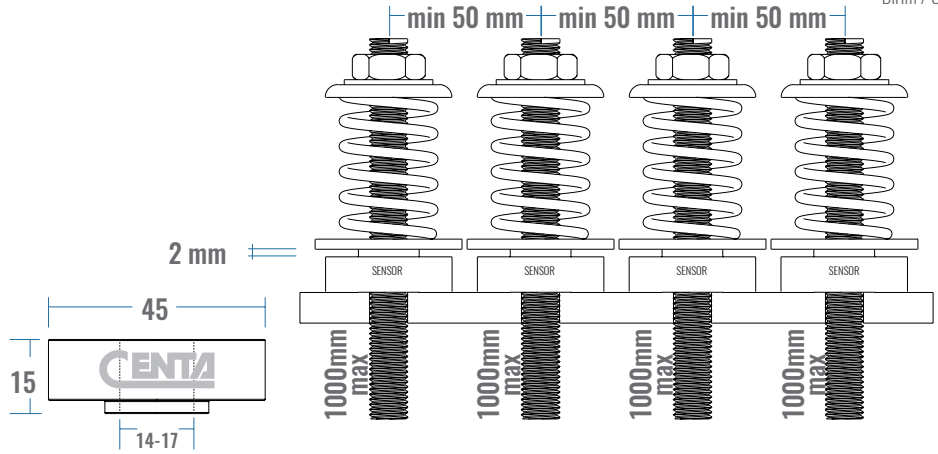

RS4 TEKNİK BİLGİLERİ

- Mekanik kapasite : 500/1000 kg/halat
- Besleme gerilimi : 220 VAC / 24 DC
- Programlanabilir çıkış adeti : 4
- Çap: 45mm Yükseklik: 15mm
- Halat şişesine kolay montaj edilebilir.
- Kafa boşluğu mesafesi normalden daha kısa olan asansörler için elverişlidir.
- 2:1 askı sistemli asansörlerde de kullanılabilir.

RS4 TECHNICAL INFORMATION

- Mechanical capacity : 500/1000 kg/rope
- Supply voltage : 220 VAC / 24 DC
- Quantity of programmable outputs : 4
- Dia: 45mm h: 15mm
- Very easy to install
- Very easy to install to the overhead - suspension of the cabin
- Suitable for the elevators which overhead - distance in the shaft is shorter than normal standarts and also usable for 2:1 rope - suspension system.